

Series

M60 / M125 / M250 / M500



UL CE IP54

Advanced Diagnostics, Unrivaled Output Pressure & Low Temp. Capability for Complete Reliability



Pulsarlube **M**

Features & Advantages

Cost Savings

Substantial savings from the use of replaceable grease pouches and battery packs (Service Pack)

Remote Installation

High output pressure (30 Bar) enables remote installation up to 10m (33ft)

Multi-Point Installation

Up to 8 lube points using Ø6mm tube, max. 6m (20ft) per point

Simple Operation

Easy to program with built-in LCD and simple button controls

Convenient Maintenance

Transparent container for easy visual inspection of remaining lubricant

Other Features


- ▶ Various dispensing settings & grease pouch volumes to suit a wide range of industrial applications
- ▶ Auto Lock Out mode to prevent unintentional mode changes
- ▶ Easy to install in hazardous & confined areas

Typical Applications



- Automotives, irons/steel mills, and nuclear power plants
- Cleanroom & LM Guide where precise, multi-point lubrication is needed
- HVAC equipment & cooling towers where long lube lines may be necessary
- Motors and pumps in city water & wastewater treatment facilities
- Any places with extreme (low or high) temperature

Details

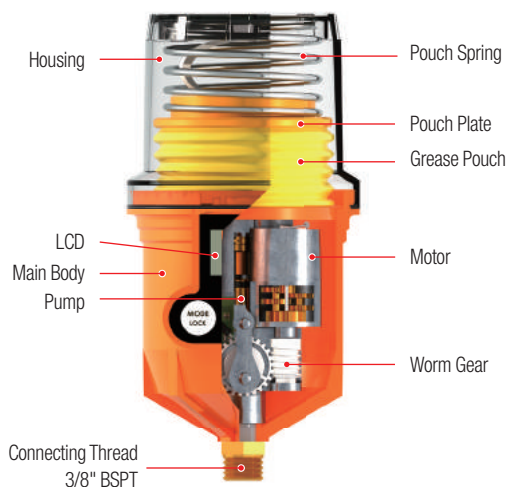

Specifications

Grease Pouch Capacity

60ml/125ml/250ml/500ml (replaceable)

Operating Pressure

Avg. 30 Bar
Max. 60 Bar

Operating Temperature

Standard Alkaline Battery: -15°C~60°C (5°F~140°F)
Optional Lithium Battery: -40°C~60°C (-40°F~140°F)

Dispensing Periods

60ml: 1,2,3...10,11,12 month
125ml/250ml: 1, 2, 3, 6, 12 month & H (15 days)
500ml: 1, 2, 4, 6, 12, 18, 24 month & H (15 days)

Multi-Point Installation

Max. 6m (20ft) with Ø6mm tube
(up to 8 lube points)

Remote Installation

Max. 10m (33ft) with Ø6mm tube

Power Supply

DC 4.5V Battery Pack (replaceable)
Standard: Alkaline Battery
Optional: Lithium Battery

Dispensing Volume

0.34ml/stroke (@20°C/68°F)

Product Certifications & IP Code

UL/CE/IP54